


**WIRELINE THIN WALL INDUCTION DRILL RODS**

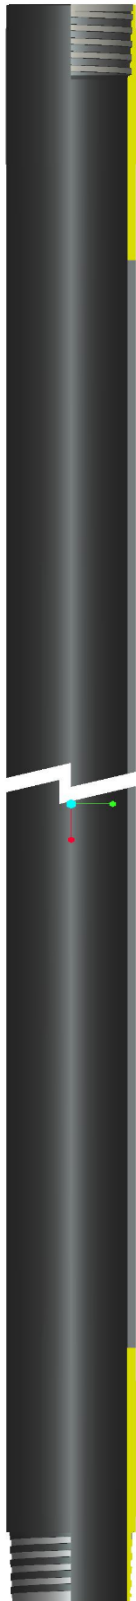

ROD ENDS ARE HARDENED (30 TO 35 Rc) THROUGHOUT THE WALL THICKNESS UPTO A LENGTH OF 150MM

| SIZE | LENGTH | O.D. | I.D. | T.P.I | WEIGHT KGS | PART NUMBERS |
|------|--------|------|------|-------|------------|--------------|
| ATW  | 1.5M   | 44.5 | 36.8 | 4.62  | 5.9        | K5-01-001    |
| ATW  | 3.0M   | 44.5 | 36.8 | 4.62  | 11.8       | K5-01-002    |
| BTW  | 1.5M   | 56.5 | 48.8 | 4.62  | 7.6        | K5-02-001    |
| BTW  | 3.0M   | 56.5 | 48.8 | 4.62  | 15.3       | K5-02-002    |
| NTW  | 1.5M   | 73.3 | 64.2 | 4.62  | 28.0       | K5-03-001    |
| NTW  | 3.0M   | 73.3 | 64.2 | 4.62  | 14.0       | K5-03-002    |

ALL KUVAWALA WIRELINE DRILL RODS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 / SAE 4130 / SAE 5130 . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES FOR MID BODY AND STRAIGHTNESS BETTER THAN 1 : 6000 .